

Exam : Cisco 642-066

**Title : Advanced Routing and
Switching for Field
Engineers**

Version : Demo

Important Note, Please Read Carefully

Other VisualExams products

[All visualexams IT Exam Products](#)

Our products of Offline Testing Engine

Use the offline Testing engine product to practice the questions in an exam environment.

Build a foundation of knowledge which will be useful also after passing the exam.

[visualexams Testing Engine](#)

Latest Version

We are constantly reviewing our products. New material is added and old material is revised. Free updates are available for 90 days after the purchase. You should check your member zone at VisualExams and update 3-4 days before the scheduled exam date.

Here is the procedure to get the latest version:

1. Go to <http://www.visualexams.com/>
2. Log in the **User Center**
3. The latest versions of all purchased products are downloadable from here. Just click the links.

Feedback

If you spot a possible improvement then please let us know. We always interested in improving product quality.

Feedback should be send to Visualexams@hotmail.com. You should include the following: Exam number, version, page number, question number, and your login Account.

Our experts will answer your mail promptly.

Explanations

This product does not include explanations at the moment. If you are interested in providing explanations for this exam, please contact Visualexams@hotmail.com.

Features

- Comprehensive questions with complete details
- Instant Downloadable in PDF form.
- Verified Answers Researched by Industry Experts
- Questions accompanied by exhibits.
- Drag and Drop questions as experienced in the Actual Exams.
- These questions and answers are backed by our GUARANTEE.
- Questions updated on regular basis.
- Like actual certification exams our product is in multiple-choice questions (MCQs)

Commitment to Your Success: At VisualTestExam.com, we are committed to you ongoing success. Our exams and questions are constantly being updated and compared to industry standards.


Want to earn a Microsoft certification like MCSE, MCSE 2003, CCNA, CCNP? Thinking about getting an A+ or CCSP?

A, CCSP or Network+ Certification with less effort and time. You will be astonished at the theoretical and practical knowledge you will acquire in such a short period of time using our Certification Training Products. Our Study material will enable you to pass your Microsoft, Your Cisco and any other certification on the very first attempt.

Guarantee

Visualexams provides the most competitive quality of all exams for the customers, we guarantee your success at the first attempt with only our Certification Question&Answers, if somehow you do not pass the exam at the first time, we will not only arrange FULL REFUND for you, but also provide you another exam of your claim, ABSOLUTELY FREE!

1. Refer to the exhibit. Which Catalyst switch configuration would protect a customer network from possible disruption in the case in which an unauthorized switch is added to the network?

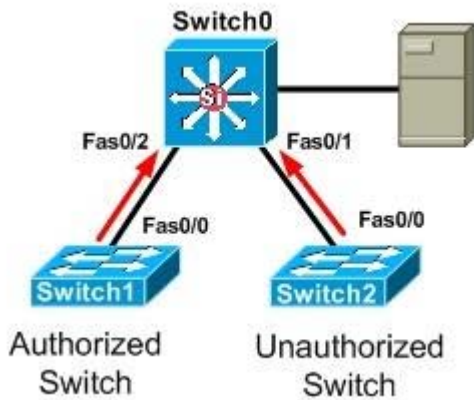

A. Switch0#show running-configuration

!

hostname Switch0

!

no spanning-tree optimize bpdu transmission

spanning-tree extend system-id

!

interface FastEthernet0/1

switchport protected

!

B. Switch0#show running-configuration

!

hostname Switch0

!

spanning-tree portfast bpduguard default

no spanning-tree optimize bpdu transmission

spanning-tree extend system-id

!

interface FastEthernet0/1

spanning-tree guard root

!

C. Switch0#show running-configuration

```
!  
hostname Switch0  
!  
no spanning-tree optimize bpdu transmission  
spanning-tree extend system-id  
!  
interface FastEthernet0/1  
switchport mode access
```

D. Switch0#show running-configuration

```
!  
hostname Switch0  
!  
no spanning-tree optimize bpdu transmission  
spanning-tree extend system-id  
!  
interface FastEthernet0/1  
switchport port-security violation restrict
```

Answer: B

2. While troubleshooting a network outage, you discover that an employee brought a switch from home into the office to connect additional equipment to the network. In order to increase his speed, he connected this switch to both network ports in his office, resulting in a bridge loop. Which of these can you implement to prevent future occurrences of this issue?

- A. RSTP
- B. root guard
- C. BPDU guard
- D. GLBP

Answer: C

3. Refer to the exhibit. For the given configuration, on packets leaving the router on interface FastEthernet0/0 that matches the high traffic class, what will the MPLS experimental bit be set to?

```
policy-map high-priority
  class high
    set ip dscp 46
    set mpls experimental 4
policy-map low-priority
  class high
    set ip dscp 46
    set mpls experimental 3
policy-map mid-priority
  class high
    set ip dscp 46
    set mpls experimental 2

interface Loopback0
 ip address 10.100.2.1 255.255.255.0
!
interface FastEthernet0/0
 ip address 10.10.1.2 255.255.255.0
 service-policy output low-priority
 service-policy input mid-priority
```

- A. 0
- B. 1
- C. 2
- D. 3
- E. 4
- F. 5

Answer: D

4. Which tool allows a LAN client to determine which router should be the first hop to a particular remote destination, allowing simplified client configuration and processing without creating a single point of failure?

- A. Proxy ARP
- B. Dynamic Routing Protocol
- C. IRDP
- D. VRRP

Answer: D

5. When implementing MPLS VPNs between CE and PE routers, which of these statements is correct?
- A. If using IS-IS as the PE-CE routing protocol, no redistribution is required.
 - B. If using static routes between the CE and PE routers, no redistribution of other VPN routes is required.
 - C. If the PE-CE protocol is not BGP, redistribution of other VPN routes from MP-BGP is required.
 - D. If RIP is the routing protocol that is used between the PE-CE routers, no redistribution is required, but any other protocol will require redistribution.
 - E. If using OSPF or EIGRP as the PE-CE routing protocol, redistribution is not required, but any other protocol or static route will require redistribution.

Answer: C

6. You would like to log messages up to the severity level "Notification." Which three of these commands will you need to issue in order to enable syslog messages to be sent to the syslog server at the IP address 10.1.5.5? (Choose three.)

- A. logging on
- B. logging host 10.1.5.5
- C. logging trap notifications
- D. logging syslog notifications
- E. logging monitor notifications
- F. logging console notifications

Answer: ABC

7. Refer to the exhibit. What is the HSRP state and priority of this interface after HSRP reaches its steady state?

```
SB: V111 Grp 11 Tracked interface Port-channel10 Down
SB: V111 Grp 11 Priority 201/251 -> 151/251
SB11: V111 Coup in 172.16.11.111 Standby pri 200 ip 172.16.11.115
SB11: V111 Active: j/Coup rcvd from higher pri router (200/172.16.11.111)
SB11: V111 Active router is 172.16.11.111, was local
SB11: V111 Standby router is unknown, was 172.16.11.111
SB11: V111 Active -> Speak
%STANDBY-6-STATECHANGE: Vlan11 Group 11 state Active -> Speak
SB11: V111 Redundancy "hsrp-V111-11" state Active -> Speak
SB11: V111 Speak: d/Standby timer expired (unknown)
SB11: V111 Standby router is local
SB11: V111 Speak -> Standby
SB11: V111 Redundancy "hsrp-V111-11" state Speak -> Standby
```

- A. Active, Priority 151

- B. Active, Priority 201
- C. Active, Priority 251
- D. Standby, Priority 151
- E. Standby, Priority 201
- F. Standby, Priority 251

Answer: D

8. While your MPLS core is using Cisco routers, the core of a company you have acquired is not. After extending your MPLS VPN networks by integrating the cores, you discover that the end-to-end LPS path between PE routers cannot be established.

Which of the following may have caused this problem?

- A. the MTUs do not match
- B. the BGP protocol versions do not match
- C. MPLS is not supported between different vendors
- D. MP-BGP is not supported between different vendors
- E. you are using Cisco proprietary TDP in your existing core

Answer: E

9. You are troubleshooting an issue which is causing full-sized packets entering the MPLS cloud to be dropped. You have discovered that one of the switches in the MPLS core is not a Cisco switch, but otherwise the MPLS MTU size is set to 1508 bytes on the routers. Based on this information, which of these may be the reason the packets are being dropped?

- A. no switches support oversized packets
- B. by definition, the maximum MTU is 1500 bytes
- C. the switch on your MPLS core that was not produced by Cisco does not support oversized packets
- D. in this situation, the MTU setting is irrelevant; in MPLS the maximum acceptable IP packet size is 1492 bytes
- E. as MPLS VPN labeling increases the size of the packet by 8 bytes, the IP MTU should have been changed to 1508

Answer: C

10. Refer to the exhibit. Which two of these events will be the result of issuing the above command?
(Choose two.)

```
Router(config-vrf)# rd 115:43
```

- A. A 64-bit IPv4 prefix will be created.
- B. The route distinguisher will be used to indicate VPN membership.
- C. Extended BGP communities will be used to encode route distinguishers.
- D. A 96-bit VPNv4 prefix will be created and propagated across the IP network.
- E. The route distinguisher is 64 bits and will be prepended to an existing IPv4 route to make it globally unique.

Answer: DE

11. Refer to the exhibit. You want to minimize the downtime that results from supervisor engine switchovers on Cisco 6500 Series Switches and Cisco 7600 Series Routers. To achieve this, you are considering deploying a Cisco Nonstop Forwarding with Stateful Switchover solution using OSPF.

In the exhibit you can see the output of the show ip ospf neighbor detail command. Which trait of systems using Cisco Nonstop Forwarding with Stateful Switchover and OSPF is shown in the exhibit output and will impact your plan?

```
Router> show ip ospf neighbor detail
Neighbor 20.5.5.5, interface address 20.20.6.5
  In the area 0 via interface Ethernet2/0
  Neighbor priority is 1, State is FULL, 18 state changes
  DR is 20.20.6.7 BDR is 20.20.6.5
  Options is 0x52
  LLS options is 0x1 (LR)
  Dead timer due in 00:00:39
  Neighbor is up for 00:00:06
  Index 1/1, retransmission queue length 0, number of retransmission 4
  First 0x0(0)/0x0(0) Next 0x0(0)/0x0(0)
  Last retransmission scan length is 1, maximum is 2
  Last retransmission scan time is 0 msec, maximum is 0 msec
```

- A. Stateful Switchover for Cisco Nonstop Forwarding only works with BGP.
- B. Stateful Switchover for Cisco Nonstop Forwarding must be configured on all adjacent routers.
- C. Cisco Nonstop Forwarding with Stateful Switchover helper mode is not supported on the adjacent router.
- D. Cisco Nonstop Forwarding with Stateful Switchover helper mode for OSPF has been standardized and is supported on the adjacent router.

Answer: D

12. What can be specified in IP VACLs?

- A. IP source only
- B. IP destination only
- C. protocol and IP source only
- D. IP source, IP destination, and ports

Answer: D

13. Which two of the following actions must an OSPF NSF-capable router execute after a supervisor engine switchover? (Choose two.)

- A. send the graceful restart message
- B. exchange the complete routing table
- C. re-acquire the link state database content for the network
- D. re-learn the available OSPF neighbors with neighbor relationship restart
- E. re-learn the available OSPF neighbors without neighbor relationship restart

Answer: CE

14. Cisco Catalyst switches support which three PVLAN port types? (Choose three.)

- A. private
- B. isolated
- C. permanent
- D. community
- E. non-isolated
- F. promiscuous

Answer: BDF

15. What is the function of the no switchport Catalyst switch interface configuration command?

- A. switches the port from access mode to trunk mode
- B. converts the port from physical Layer 2 port to physical Layer 3 port
- C. enables the interface for Layer 2 switching
- D. disables the interface to prevent traffic flow

E. clears all the configurations on the interface

Answer: B

16. What is the purpose of using VPN hardware acceleration equipment?

- A. to use WebVPN instead of IPSec
- B. to decrease performance and efficiency
- C. to offload encryption functions from a router CPU
- D. to offload encryptions functions from router memory

Answer: C

17. Refer to the exhibit. Which show command would display the information in the exhibit?

```
FastEthernet0/1

Service-policy input: high-priority

  Class-map: high (match-all)
    0 packets, 0 bytes
    5 minute offered rate 0 bps, drop rate 0 bps
    Match: ip precedence 5
    QoS Set
      ip dscp 46
      Packets marked 0
      mpls experimental 4
      Packets marked 0

  Class-map: class-default (match-any)
    0 packets, 0 bytes
    5 minute offered rate 0 bps, drop rate 0 bps
    Match: any
```

- A. show policy-map
- B. show policy-map high-priority
- C. show interfaces fastEthernet 0/1 policy-map
- D. show policy-map interfaces fastEthernet 0/1

Answer: D

18. You are operating a multi-vendor network and are considering adding redundancy at the access level. Which routing redundancy solution should you implement?

- A. Hot Standby Router Protocol

- B. Gateway Load Balancing Protocol
- C. Virtual Router Redundancy Protocol
- D. both Gateway Load Balancing Protocol and Hot Standby Router Protocol

Answer: C

19. Which two of the following statements are true about HSRP load sharing? (Choose two)

- A. It is achieved by using more than one HSRP group.
- B. It is done in regards to either round robin or weight basis.
- C. It is used to offload the active router in a certain HSRP group.
- D. Single group HSRP is used to achieve more efficient link utilization.
- E. The return traffic is influenced by HSRP load sharing configuration.

Answer: AC

Visualexams.com was founded in 2006. The safer,easier way to help you pass any IT Certification exams . We provide high quality IT Certification exams practice questions and answers(Q&A). Especially Adobe, Apple, Citrix, Comptia, EMC, HP, HuaWei, LPI, Nortel, Oracle, SUN, Vmware and so on. And help you pass any IT Certification exams at the first try.

Web site: <http://www.visualexams.com>

You can reach us at any of the email addresses listed below.

E-Mail: [visualexams \(at\) hotmail.Com](mailto:visualexams@hotmail.com)