

**Exam : CENP PW0-300**

**Title : Certified Wireless Network  
Expert**

**Version : Demo**

## Important Note, Please Read Carefully

### Other VisualExams products

[All visual exams IT Exam Products](#)

### Our products of Offline Testing Engine

Use the offline Testing engine product to practice the questions in an exam environment.

Build a foundation of knowledge which will be useful also after passing the exam.

[visual exams Testing Engine](#)

### Latest Version

We are constantly reviewing our products. New material is added and old material is revised. Free updates are available for 90 days after the purchase. You should check your member zone at VisualExams and update 3-4 days before the scheduled exam date.

Here is the procedure to get the latest version:

1. Go to <http://www.visual exams.com/>
2. Log in the **User Center**
3. The latest versions of all purchased products are downloadable from here. Just click the links.

### Feedback

If you spot a possible improvement then please let us know. We always interested in improving product quality.

Feedback should be send to [Visual exams@hotmail.com](mailto:Visual exams@hotmail.com). You should include the following: Exam number, version, page number, question number, and your login Account.

Our experts will answer your mail promptly.

### Explanations

This product does not include explanations at the moment. If you are interested in providing explanations for this exam, please contact [Visual exams@hotmail.com](mailto:Visual exams@hotmail.com).

### Features

- Comprehensive questions with complete details
- Instant Downloadable in PDF form.
- Verified Answers Researched by Industry Experts
- Questions accompanied by exhibits.
- Drag and Drop questions as experienced in the Actual Exams.
- These questions and answers are backed by our GUARANTEE.
- Questions updated on regular basis.
- Like actual certification exams our product is in multiple-choice questions (MCQs)

**Commitment to Your Success: At VisualTestExam.com, we are committed to your ongoing success. Our exams and questions are constantly being updated and compared to industry standards.**

Want to earn a Microsoft certification like MCSE, MCSE 2003, CCNA, CCNP? Thinking about getting an A+ or CCSP?

A, CCSP or Network+ Certification with less effort and time. You will be astonished at the theoretical and practical knowledge you will acquire in such a short period of time using our Certification Training Products. Our Study material will enable you to pass your Microsoft, Your Cisco and any other certification on the very first attempt.

## **Guarantee**

VisualExams provides the most competitive quality of all exams for the customers, we guarantee your success at the first attempt with only our Certification Question&Answers, if somehow you do not pass the exam at the first time, we will not only arrange FULL REFUND for you, but also provide you another exam of your claim, ABSOLUTELY FREE!

1. In a Split MAC wireless network architecture, lightweight APs map user priorities (UPs) specified by the QoS STA on incoming frames to \_\_\_\_\_.

- A. IEEE 802.1D Frame Precedence Values
- B. GRE Priority Bits
- C. IEEE 802.1Q Tag Protocol Identifiers
- D. IP Differentiated Services Code Points
- E. QoS Control Header Values

**Answer: D**

2. Given: An ingress frame arrives on the Ethernet port of an autonomous AP marked with an IEEE 802.1D user priority value.

Which IEEE 802.1D user priority values (by name) will assure the data payload carried by the Ethernet frame gets assigned to the highest priority WMM queue?

- A. Controlled Load
- B. Network Control
- C. Video
- D. Voice
- E. Best Effort
- F. Excellent Effort

**Answer: BD**

3. Given: When the delayed Block Ack policy is used between two QoS STAs, the recipient must respond to a BlockAckReq frame with an ACK frame. The recipient must then send its BlockAck response frame in a subsequently obtained TXOP.

Once the contents of the BlockAck frame have been prepared, the recipient must \_\_\_\_\_.

- A. Send the BlockAck response frame to the originator in the earliest possible TXOP using the highest priority AC.
- B. Send an ATIM to the originator signifying that the BlockAck response frame is ready for transmission.
- C. Include the TID of the BlockAckReq in the next TXOP Request to the HC.
- D. Wait for one PIFS after the next Beacon and transmit the BlockAck response to the originator using the

same AC as the BlockAckReq frame.

**Answer: A**

4. A QoS STA obtains a TXOP for an access category (AC) after what two parameters are met?

- A. After a scheduled service period ends
- B. The medium is idle at the AIFS[AC] slot boundary
- C. The backoff time for that AC has expired
- D. After a Block ACK Response
- E. After a Target Beacon Transmission Time (TBTT)

**Answer: BC**

5. When using a protocol analyzer to capture conversations over a WLAN, you may often encounter encrypted data frames. Most WLAN protocol analyzers have a feature that allows the analyst to save and reload the captured frames into memory at a later time. Using this functionality, what task can be performed?

- A. When IEEE 802.1X/LEAP is being used as the WLAN security mechanism, the authentication response frame can be replayed from a saved trace file at a later time to successfully authenticate a hacker.
- B. If a user name and password for an IEEE 802.1X/EAP-TTLS security implementation can be obtained through social engineering tactics, the user name and password can be entered into the analyzer to decrypt the frames from a saved trace file.
- C. An analyst can search through the captured frames looking for RADIUS frames that will disclose the user's password.
- D. Encrypted frames may be decrypted offline, after they are captured, by entering a WEP key or WPA passphrase into the analyzer.

**Answer: D**

6. How long, in microseconds, is the required Slot Time announced by an AP in an ERP BSS when both HR-DSSS and ERP-OFDM client stations are associated to the AP?

- A. 2
- B. 4

- C. 9
- D. 10
- E. 20

**Answer: E**

7. The IEEE 802.11 standard allows for frame fragmentation. Which two fields in the IEEE 802.11 frame are involved in numbering data frame fragments and notifying the receiving station when all of the fragments of a data frame have been received?

- A. Capability Information field
- B. Frame Control field
- C. ERP Information field
- D. Sequence Control field
- E. DS Parameter field
- F. Ordered Service field

**Answer: BD**

8. According to the IEEE 802.11 standard (as amended), transmit power information is carried in which frames?

- A. TPC Report frame
- B. ADDTS Response frame
- C. Probe Response frame
- D. Beacon frame
- E. Channel Switch Announcement frame
- F. Measurement Report frame

**Answer: ACD**

9. What events will cause an established TSPEC to be deleted by a AP?

- A. Disassociation of the non-AP QoS STA using the TSPEC from the QoS BSS
- B. Traffic Stream inactivity timeout
- C. Reassociation of the non-AP QoS STA with another QoS AP

- D. Receipt of a DELBA frame from a non-AP QoS STA
- E. Receipt of an Update TSPEC frame from a non-AP QoS STA
- F. A Controlled Access Phase (CAP) burst

**Answer:** ABC

10. Many autonomous access points support IEEE 802.1Q VLAN tagging. When analyzing a WLAN system using IEEE 802.1Q tags, where can the VLAN tag number be seen?

- A. In the Sequence Control field of the MSDU
- B. In the PLCP header's Service field
- C. In the Frame Control field of the MPDU header
- D. In the Ethernet header on the wired port of the access point
- E. In the Beacon Management frame's Capabilities fixed field

**Answer:** D

11. Given: ABC Company is implementing a QoS enabled infrastructure that will support both voice and data. The WLAN controller is connected to one of three core layer-3 Ethernet switches. Each core layer-3 Ethernet switch has multiple edge layer-2 Ethernet switches attached. Lightweight APs are connected to all edge layer-2 Ethernet switches. The WLAN controller is on subnet 10.1.1.0/24, and the APs are on numerous other subnets. The APs are connected to the WLAN controller via LWAPP tunnels. When IEEE 802.11 frames arrive at a lightweight AP from a QoS STA that need to be sent to the WLAN controller, which bits can the AP mark to signal the layer-2 and layer-3 Ethernet switches to use higher priority processing?


- A. The Ethernet frame's 802.1Q priority tag bits
- B. The IP header's TOS bits
- C. The IEEE 802.11 frame's QoS Control bits
- D. The LWAPP header's C bit
- E. The UDP header's PRI bits

**Answer:** AB

12. Given: ABC Company has implemented a QoS capable IEEE 802.11 WLAN controller based network

with lightweight access points as shown in the graphic.

What is the advantage of the access point mapping IEEE 802.11 user priority (UP) values to DSCP values in the IP header that encapsulates the 802.11 frame?

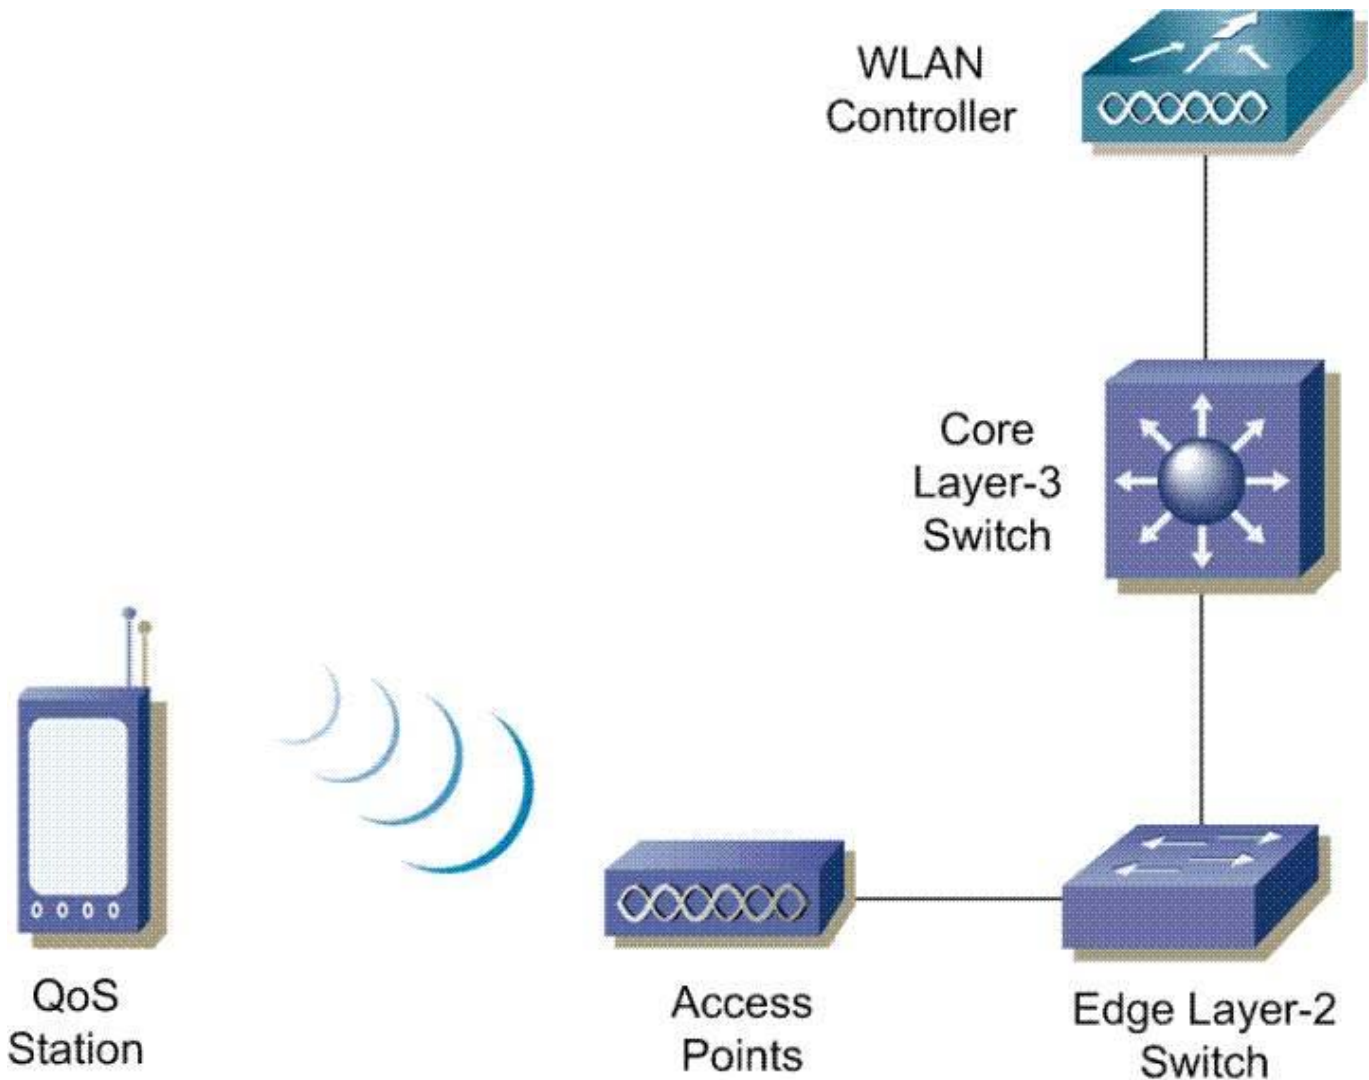

- A. Direct mapping of UP-to-DSCP values increases effective throughput between the access point and WLAN controller.
- B. Since UP-to-802.1Q PCP mappings are not possible at the access point, the only method of prioritizing upstream data is through UP-to-DSCP mappings.
- C. The QoS markings will survive layer 2 hops that could remove 802.1Q PCP values.
- D. UP-to-DSCP mappings are more granular than UP-to-802.1Q PCP mappings.

**Answer: C**

13. What does a TXOP Limit value of 0 in the EDCA Parameter Set included in a QoS AP's Beacons or Probe Response frames indicate?

- A. It indicates that one or more MSDUs or MMPDUs must be transmitted at the lowest basic rate during each TXOP.
- B. It indicates that QoS STAs must wait for the HC to transmit a Polled TXOP before they can transmit MSDUs or MMPDUs.
- C. It indicates that no MSDUs or MMPDUs may be transmitted by a non-pollable QoS STA.
- D. It indicates that a single MSDU or MMPDU may be transmitted at any rate for each TXOP.
- E. It indicates that QoS STAs may transmit voice MPDUs (Access Category 7, 8) during TXOPs.

**Answer: D**

14. What is indicated to a QoS AP when a QoS STA sets U-APSD Flag bits to 1 in Association and Reassociation frames?

- A. Which access categories are both trigger- and delivery-enabled.
- B. The maximum number of data frames that should be queued by the QoS AP for that QoS STA.
- C. The number of TXOPs that are requested by this QoS STA.
- D. Which user priorities are mapped to access categories.
- E. Which access categories are scheduled.

**Answer: A**

15. ABC Corp has just installed a single HR-DSSS access point into their medium-sized office environment. As the WLAN administrator at ABC Corp, you use a wireless protocol analyzer to troubleshoot a performance problem. You place your analyzer close to the access point, and capture some traffic from office users.

Given the screenshot shown, which statement offers the best explanation for the poor WLAN performance of ABC's new HR-DSSS WLAN?

Packet	Source	Destination	BSSID	Channel	Signal	Data Rate	Protocol
398	IP-192.168.100.11	IP-192.168.100.1	00:0D:ED:A5:4F:70	11	4%	11.0	PING Req
400	IP-192.168.100.11	IP-192.168.100.1	00:0D:ED:A5:4F:70	11	7%	5.5	PING Req
401	IP-192.168.100.11	IP-192.168.100.1	00:0D:ED:A5:4F:70	11	5%	2.0	PING Req
403	IP-192.168.100.11	IP-192.168.100.1	00:0D:ED:A5:4F:70	11	8%	1.0	PING Req
404	00:0D:ED:A5:4F:70	Cisco:1F:12:65		11	60%	1.0	802.11 Ack
405	IP-192.168.100.1	IP-192.168.100.11	00:0D:ED:A5:4F:70	11	62%	11.0	PING Reply
406	IP-192.168.100.1	IP-192.168.100.11	00:0D:ED:A5:4F:70	11	61%	11.0	PING Reply
407	Cisco:1F:12:65	00:0D:ED:A5:4F:70		11	7%	2.0	802.11 Ack

- A. There is likely a source of RF interference somewhere around the access point. This is causing many data frames to be retransmitted, so overall WLAN throughput has been greatly diminished.

- B. Due to an ERP client joining the BSS, protection mechanisms have been enabled in the BSS by the access point. These protection mechanisms greatly increase protocol overhead, thereby decreasing overall WLAN throughput.
- C. A nearby HR-DSSS access point is operating on an adjacent channel causing a significant amount of corrupt frames within ABC's BSS. These corrupt frame fragments are congesting the channel on which ABC's WLAN is operating, thereby decreasing its throughput.
- D. One of the WLAN users has moved far enough away from the access point that his client station has begun transmitting frames at the minimum supported data rate. Even when a single user uses this rate for Data frames, throughput for the entire WLAN as a whole is slowed significantly.

**Answer: D**

16. Which statements accurately describe IEEE 802.11 EDCA collision handling in a WMM compliant infrastructure WLAN?

- A. Data frames from lower priority colliding ACs behave as if there were an external collision on the wireless medium.
- B. Collisions between contending EDCAFs within a QoS STA are resolved within the QoS STA
- C. WMM-compliant applications collaborate within a QoS STA to handle transmission collisions at layer 7 of the OSI model
- D. The WMM specification requires use of RTS/CTS as part of the EDCAF in each QoS STA to avoid internal collisions between applications
- E. Collisions within a QoS STA do not require setting retry bits in MAC headers of MPDUs from lower priority ACs

**Answer: ABE**

17. Which statement is FALSE regarding use of admission control in a QoS BSS?

- A. The IEEE 802.11 QoS facility implements a single admission control mechanism for use in contention-free periods (CFPs) and contention periods (CPs).
- B. The ACM bit is static for the duration of the lifetime of a BSS.
- C. If a QoS STA desires to send data without admission control using an access category (AC) that mandates admission control, the QoS STA will use a lower priority AC that does not use admission control.

D. A QoS AP uses ACM subfields in the EDCA Parameter Set element to indicate admission control requirements for each access category (AC).

E. A hybrid coordinator may enforce admission control policies during both contention-free periods (CFPs) and contention periods (CPs).

**Answer: A**

18. Given the IEEE 802.11 Beacon frame decode shown, determine which statement is true.

```
network media info
- timestamp : 5/18 18:37:04.398113
- signal strength : 43% (-69 dBm)
- noise level : 0% (-95 dBm)
- frame length : 122
- data rate : 2 mbps
- channel : 3
- CRC error : no
802.11 MAC header
+ frame control
- duration : 0 usec
- dest addr : FF:FF:FF:FF:FF:FF
- src addr : 00:0D:ED:A5:4F:70
- bssid : 00:0D:ED:A5:4F:70
- frag number : 0
- seq number : 1444
802.11 frame body
- timestamp : 30B1BFA1:02000000
- beacon interval : 100 TU(s)
+ capability info
+ info : SSID (0)
+ info : supported rates (1)
- info : DS param set (3)
- length : 1
- current channel : 1
+ info : TIM (5)
- info : ERP information (42)
- length : 1
- Non-ERP station present : yes
- Use protection : yes
```

- A. The access point is operating on channel 3.
- B. The access point has both 1 Mbps and 2 Mbps configured as basic rates.
- C. This Beacon frame came from an ERP access point.
- D. The duration value of 0 ec means that this access point is operating in HEMM mode.
- E. ERP mobile stations must use the RTS/CTS protocol before Data transmissions.

**Answer: C**

19. In an ERP QoS BSS using APSD, when is the Power Management subfield of the Frame Control field set to a value of 1?

- A. Only in management frames sent by a non-AP QoS STA immediately prior to entering a low power state (dozing).
- B. On any QoS Data frame sent by the QoS AP subsequent to a PS-Poll frame.
- C. On any frame transmitted by a non-AP QoS STA using APSD.
- D. Only in the PS-Poll frame sent from a STA operating in PS mode.

**Answer: C**

20. The IEEE 802.11 (as amended) Dynamic Frequency Selection (DFS) service is capable of performing what functions?

- A. Establishing an interference baseline on all 2.4 GHz channels
- B. Using modulation switching techniques to avoid interfering with radar systems
- C. Testing channels for radar before using a channel and while operating in a channel
- D. Suspending operations on a channel with high IEEE 802.11 co-channel interference
- E. Requesting and reporting of measurements in the current and other channels

**Answer: CE**

Visualexams.com was founded in 2006. The safer,easier way to help you pass any IT Certification exams . We provide high quality IT Certification exams practice questions and answers(Q&A). Especially Adobe, Apple, Citrix, Comptia, EMC, HP, HuaWei, LPI, Nortel, Oracle, SUN, Vmware and so on. And help you pass any IT Certification exams at the first try.

Web site: <http://www.visualexams.com>

You can reach us at any of the email addresses listed below.

E-Mail: [visualexams \(at\) hotmail.Com](mailto:visualexams@hotmail.com)