

Exam : Oracle 1Z0-051

**Title : Oracle Database: SQL
Fundamentals I**

Version : Demo

Important Note, Please Read Carefully

Other VisualExams products

[All visual exams IT Exam Products](#)

Our products of Offline Testing Engine

Use the offline Testing engine product to practice the questions in an exam environment.

Build a foundation of knowledge which will be useful also after passing the exam.

[visual exams Testing Engine](#)

Latest Version

We are constantly reviewing our products. New material is added and old material is revised. Free updates are available for 90 days after the purchase. You should check your member zone at VisualExams and update 3-4 days before the scheduled exam date.

Here is the procedure to get the latest version:

1. Go to <http://www.visual exams.com/>
2. Log in the **User Center**
3. The latest versions of all purchased products are downloadable from here. Just click the links.

Feedback

If you spot a possible improvement then please let us know. We always interested in improving product quality.

Feedback should be send to Visual exams@hotmail.com. You should include the following: Exam number, version, page number, question number, and your login Account.

Our experts will answer your mail promptly.

Explanations

This product does not include explanations at the moment. If you are interested in providing explanations for this exam, please contact Visual exams@hotmail.com.

Features

- Comprehensive questions with complete details
- Instant Downloadable in PDF form.
- Verified Answers Researched by Industry Experts
- Questions accompanied by exhibits.
- Drag and Drop questions as experienced in the Actual Exams.
- These questions and answers are backed by our GUARANTEE.
- Questions updated on regular basis.
- Like actual certification exams our product is in multiple-choice questions (MCQs)

Commitment to Your Success: At VisualTestExam.com, we are committed to you ongoing success. Our exams and questions are constantly being updated and compared to industry standards.

Want to earn a Microsoft certification like MCSE, MCSE 2003, CCNA, CCNP? Thinking about getting an A+ or CCSP?

A, CCSP or Network+ Certification with less effort and time. You will be astonished at the theoretical and practical knowledge you will acquire in such a short period of time using our Certification Training Products. Our Study material will enable you to pass your Microsoft, Your Cisco and any other certification on the very first attempt.

Guarantee

Visualexams provides the most competitive quality of all exams for the customers, we guarantee your success at the first attempt with only our Certification Question&Answers, if somehow you do not pass the exam at the first time, we will not only arrange FULL REFUND for you, but also provide you another exam of your claim, ABSOLUTELY FREE!

1. View the Exhibit and examine the structure of the SALES, CUSTOMERS, PRODUCTS, and TIMES tables.

The PROD_ID column is the foreign key in the SALES table, which references the PRODUCTS table. Similarly, the CUST_ID and TIME_ID columns are also foreign keys in the SALES table referencing the CUSTOMERS and TIMES tables, respectively.

Evaluate the following CREATE TABLE command:

```
CREATE TABLE new_sales(prod_id, cust_id, order_date DEFAULT SYSDATE)
```


AS

```
SELECT prod_id, cust_id, time_id
```

FROM sales;

Which statement is true regarding the above command?

SH

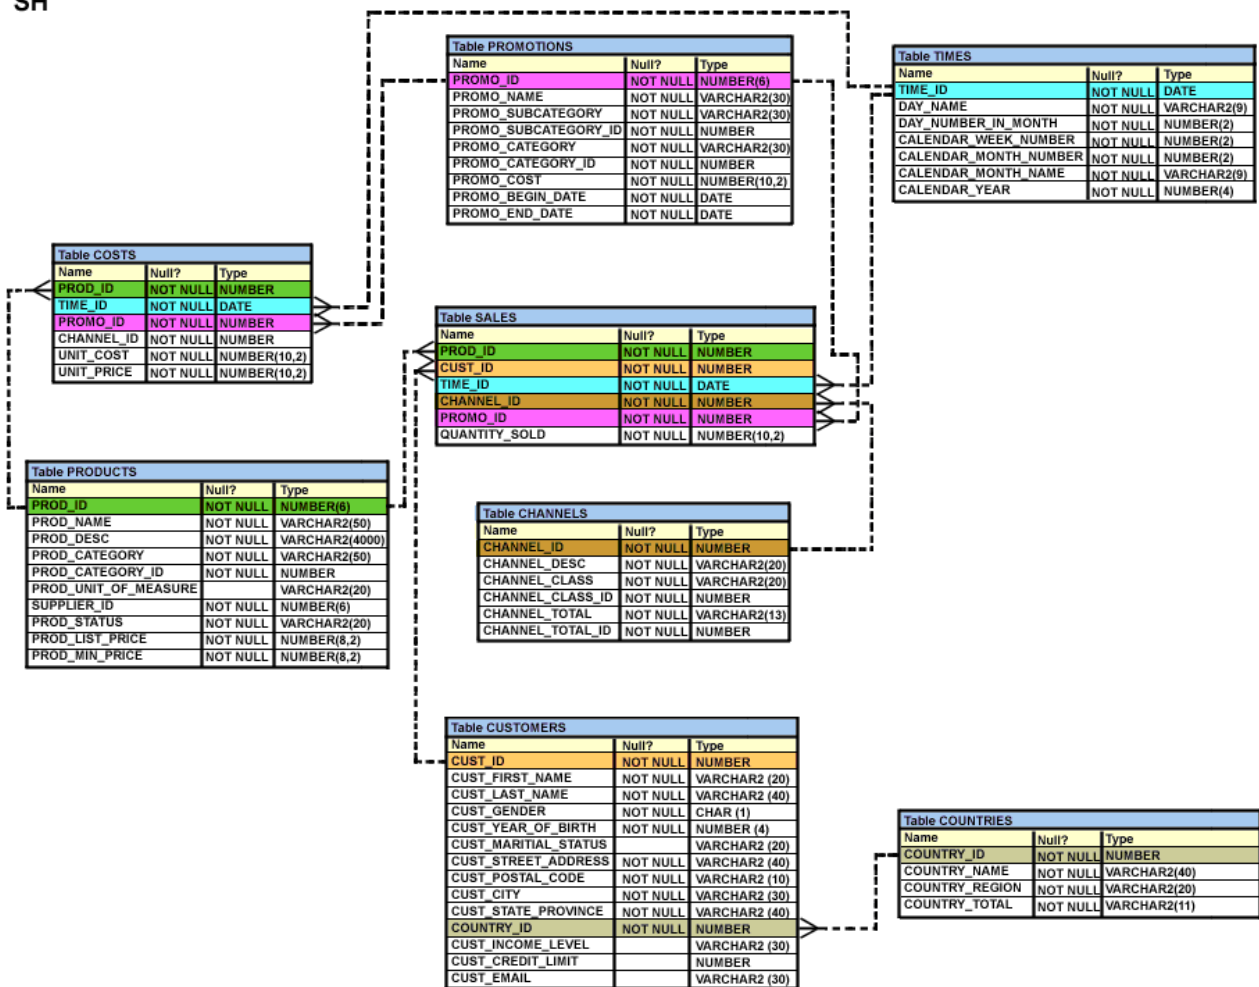

- A. The NEW_SALES table would not get created because the DEFAULT value cannot be specified in the column definition.
- B. The NEW_SALES table would get created and all the NOT NULL constraints defined on the specified columns would be passed to the new table.
- C. The NEW_SALES table would not get created because the column names in the CREATE TABLE

command and the SELECT clause do not match.

D. The NEW_SALES table would get created and all the FOREIGN KEY constraints defined on the specified columns would be passed to the new table.

Answer: B

2. View the Exhibit to examine the description for the SALES table.

Which views can have all DML operations performed on it? (Choose all that apply.)

Table SALES		
Name	Null?	Type
PROD_ID	NOT NULL	NUMBER
CUST_ID	NOT NULL	NUMBER
TIME_ID	NOT NULL	DATE
CHANNEL_ID	NOT NULL	NUMBER
PROMO_ID	NOT NULL	NUMBER
QUANTITY_SOLD	NOT NULL	NUMBER(10,2)

A. CREATE VIEW v3

AS SELECT * FROM SALES

WHERE cust_id = 2034

WITH CHECK OPTION;

B. CREATE VIEW v1

AS SELECT * FROM SALES

WHERE time_id <= SYSDATE - 2*365

WITH CHECK OPTION;

C. CREATE VIEW v2

AS SELECT prod_id, cust_id, time_id FROM SALES

WHERE time_id <= SYSDATE - 2*365

WITH CHECK OPTION;

D. CREATE VIEW v4

AS SELECT prod_id, cust_id, SUM(quantity_sold) FROM SALES

WHERE time_id <= SYSDATE - 2*365

GROUP BY prod_id, cust_id

WITH CHECK OPTION;

Answer: AB

3. You need to extract details of those products in the SALES table where the PROD_ID column contains the string '_D123'.

Which WHERE clause could be used in the SELECT statement to get the required output?

A. WHERE prod_id LIKE '%_D123%' ESCAPE '_'

B. WHERE prod_id LIKE '%_D123%' ESCAPE '\'

C. WHERE prod_id LIKE '%_D123%' ESCAPE '%_'

D. WHERE prod_id LIKE '%_D123%' ESCAPE '_'

Answer: B

4. Which two statements are true regarding single row functions? (Choose two.)

- A. They accept only a single argument.
- B. They can be nested only to two levels.
- C. Arguments can only be column values or constants.
- D. They always return a single result row for every row of a queried table.
- E. They can return a data type value different from the one that is referenced.

Answer: DE

5. Which SQL statements would display the value 1890.55 as \$1,890.55? (Choose three.)

- A. SELECT TO_CHAR(1890.55,'\$0G000D00')
FROM DUAL;
- B. SELECT TO_CHAR(1890.55,'\$9,999V99')
FROM DUAL;
- C. SELECT TO_CHAR(1890.55,'\$99,999D99')
FROM DUAL;
- D. SELECT TO_CHAR(1890.55,'\$99G999D00')
FROM DUAL;
- E. SELECT TO_CHAR(1890.55,'\$99G999D99')
FROM DUAL;

Answer: ADE

6. Examine the structure of the SHIPMENTS table:

name	Null	Type
PO_ID	NOT NULL	NUMBER(3)
PO_DATE	NOT NULL	DATE
SHIPMENT_DATE	NOT NULL	DATE
SHIPMENT_MODE		VARCHAR2(30)
SHIPMENT_COST		NUMBER(8,2)

You want to generate a report that displays the PO_ID and the penalty amount to be paid if the SHIPMENT_DATE is later than one month from the PO_DATE. The penalty is \$20 per day.

Evaluate the following two queries:

```
SQL> SELECT po_id, CASE  
WHEN MONTHS_BETWEEN (shipment_date,po_date)>1 THEN  
TO_CHAR((shipment_date - po_date) * 20) ELSE 'No Penalty' END PENALTY  
FROM shipments;  
SQL>SELECT po_id, DECODE
```

```
(MONTHS_BETWEEN (po_date,shipment_date)>1,
TO_CHAR((shipment_date - po_date) * 20), 'No Penalty') PENALTY
FROM shipments;
```

Which statement is true regarding the above commands?

- A. Both execute successfully and give correct results.
- B. Only the first query executes successfully but gives a wrong result.
- C. Only the first query executes successfully and gives the correct result.
- D. Only the second query executes successfully but gives a wrong result.
- E. Only the second query executes successfully and gives the correct result.

Answer: C

7. Which two statements are true regarding the USING and ON clauses in table joins? (Choose two.)

- A. Both USING and ON clauses can be used for equijoins and nonequijoins.
- B. A maximum of one pair of columns can be joined between two tables using the ON clause.
- C. The ON clause can be used to join tables on columns that have different names but compatible data types.
- D. The WHERE clause can be used to apply additional conditions in SELECT statements containing the ON or the USING clause.

Answer: CD

8. View the Exhibit and examine the structure of the CUSTOMERS table.

Which two tasks would require subqueries or joins to be executed in a single statement? (Choose two.)

Table CUSTOMERS		
Name	Null?	Type
CUST_ID	NOT NULL	NUMBER
CUST_FIRST_NAME	NOT NULL	VARCHAR2 (20)
CUST_LAST_NAME	NOT NULL	VARCHAR2 (40)
CUST_GENDER	NOT NULL	CHAR (1)
CUST_YEAR_OF_BIRTH	NOT NULL	NUMBER (4)
CUST_MARITAL_STATUS		VARCHAR2 (20)
CUST_STREET_ADDRESS	NOT NULL	VARCHAR2 (40)
CUST_POSTAL_CODE	NOT NULL	VARCHAR2 (10)
CUST_CITY	NOT NULL	VARCHAR2 (30)
CUST_STATE_PROVINCE	NOT NULL	VARCHAR2 (40)
COUNTRY_ID	NOT NULL	NUMBER
CUST_INCOME_LEVEL		VARCHAR2 (30)
CUST_CREDIT_LIMIT		NUMBER
CUST_EMAIL		VARCHAR2 (30)

- A. listing of customers who do not have a credit limit and were born before 1980
- B. finding the number of customers, in each city, whose marital status is 'married'
- C. finding the average credit limit of male customers residing in 'Tokyo' or 'Sydney'
- D. listing of those customers whose credit limit is the same as the credit limit of customers residing in the city 'Tokyo'
- E. finding the number of customers, in each city, whose credit limit is more than the average credit limit of all the customers

Answer: DE

9. Which statement is true regarding the INTERSECT operator?

- A. It ignores NULL values.
- B. Reversing the order of the intersected tables alters the result.
- C. The names of columns in all SELECT statements must be identical.
- D. The number of columns and data types must be identical for all SELECT statements in the query.

Answer: D

10. View the Exhibit; examine the structure of the PROMOTIONS table.

Each promotion has a duration of at least seven days .

Your manager has asked you to generate a report, which provides the weekly cost for each promotion done to I date.

Which query would achieve the required result?

Table PROMOTIONS		
Name	Null?	Type
PROMO_ID	NOT NULL	NUMBER(6)
PROMO_NAME	NOT NULL	VARCHAR2(30)
PROMO_SUBCATEGORY	NOT NULL	VARCHAR2(30)
PROMO_SUBCATEGORY_ID	NOT NULL	NUMBER
PROMO_CATEGORY	NOT NULL	VARCHAR2(30)
PROMO_CATEGORY_ID	NOT NULL	NUMBER
PROMO_COST	NOT NULL	NUMBER(10,2)
PROMO_BEGIN_DATE	NOT NULL	DATE
PROMO_END_DATE	NOT NULL	DATE

- A. SELECT promo_name, promo_cost/promo_end_date-promo_begin_date/7
FROM promotions;
- B. SELECT promo_name,(promo_cost/promo_end_date-promo_begin_date)/7
FROM promotions;
- C. SELECT promo_name, promo_cost/(promo_end_date-promo_begin_date/7)
FROM promotions;
- D. SELECT promo_name, promo_cost/((promo_end_date-promo_begin_date)/7)
FROM promotions;

Answer: D

11. View the Exhibit and examine the structure of the PRODUCTS table.

All products have a list price.

You issue the following command to display the total price of each product after a discount of 25% and a tax of 15% are applied on it. Freight charges of \$100 have to be applied to all the products.

```
SQL>SELECT prod_name, prod_list_price -(prod_list_price*(25/100))
      +(prod_list_price -(prod_list_price*(25/100))*(15/100))+100
      AS "TOTAL PRICE"
```

FROM products;

What would be the outcome if all the parentheses are removed from the above statement?

Table PRODUCTS		
Name	Null?	Type
PROD_ID	NOT NULL	NUMBER(6)
PROD_NAME	NOT NULL	VARCHAR2(50)
PROD_DESC	NOT NULL	VARCHAR2(4000)
PROD_CATEGORY	NOT NULL	VARCHAR2(50)
PROD_CATEGORY_ID	NOT NULL	NUMBER
PROD_UNIT_OF_MEASURE		VARCHAR2(20)
SUPPLIER_ID	NOT NULL	NUMBER(6)
PROD_STATUS	NOT NULL	VARCHAR2(20)
PROD_LIST_PRICE	NOT NULL	NUMBER(8,2)
PROD_MIN_PRICE	NOT NULL	NUMBER(8,2)

- A. It produces a syntax error.
- B. The result remains unchanged.
- C. The total price value would be lower than the correct value.
- D. The total price value would be higher than the correct value.

Answer: B

12. You need to produce a report where each customer's credit limit has been incremented by \$1000. In the output, the customer's last name should have the heading Name and the incremented credit limit should be labeled New Credit Limit. The column headings should have only the first letter of each word in uppercase .

Which statement would accomplish this requirement?

- A. `SELECT cust_last_name Name, cust_credit_limit + 1000
"New Credit Limit"`
FROM customers;
- B. `SELECT cust_last_name AS Name, cust_credit_limit + 1000
AS New Credit Limit`
FROM customers;
- C. `SELECT cust_last_name AS "Name", cust_credit_limit + 1000
AS "New Credit Limit"`
FROM customers;
- D. `SELECT INITCAP(cust_last_name) "Name", cust_credit_limit + 1000
INITCAP("NEW CREDIT LIMIT")`
FROM customers;

Answer: C

13. View the Exhibit and examine the structure of the PRODUCTS table.

You need to generate a report in the following format:

CATEGORIES

5MP Digital Photo Camera's category is Photo

Y Box's category is Electronics

Envoy Ambassador's category is Hardware

Which two queries would give the required output? (Choose two.)

Table PRODUCTS		
Name	Null?	Type
PROD_ID	NOT NULL	NUMBER(6)
PROD_NAME	NOT NULL	VARCHAR2(50)
PROD_DESC	NOT NULL	VARCHAR2(4000)
PROD_CATEGORY	NOT NULL	VARCHAR2(50)
PROD_CATEGORY_ID	NOT NULL	NUMBER
PROD_UNIT_OF_MEASURE		VARCHAR2(20)
SUPPLIER_ID	NOT NULL	NUMBER(6)
PROD_STATUS	NOT NULL	VARCHAR2(20)
PROD_LIST_PRICE	NOT NULL	NUMBER(8,2)
PROD_MIN_PRICE	NOT NULL	NUMBER(8,2)

- A. SELECT prod_name q"'s category is ' prod_category CATEGORIES FROM products;
- B. SELECT prod_name q['s]category is ' prod_category CATEGORIES FROM products;
- C. SELECT prod_name q'\s' ' category is ' prod_category CATEGORIES FROM products;
- D. SELECT prod_name q '<'s >' 'category is ' prod_category CATEGORIES FROM products;

Answer: CD

14. Using the CUSTOMERS table, you need to generate a report that shows 50% of each credit amount in each income level. The report should NOT show any repeated credit amounts in each income level.

Which query would give the required result?

- A. SELECT cust_income_level, DISTINCT cust_credit_limit * 0.50 AS "50% Credit Limit" FROM customers;
- B. SELECT DISTINCT cust_income_level, DISTINCT cust_credit_limit * 0.50 AS "50% Credit Limit" FROM customers;
- C. SELECT DISTINCT cust_income_level ' ' cust_credit_limit * 0.50 AS "50% Credit Limit" FROM customers;
- D. SELECT cust_income_level ' ' cust_credit_limit * 0.50 AS "50% Credit Limit" FROM customers;

Answer: C

15. View the Exhibit and examine the data in the CUSTOMERS table.

Evaluate the following query:

```
SQL> SELECT cust_name AS "NAME", cust_credit_limit/2 AS MIDPOINT,MIDPOINT+100 AS "MAX  
LOWER LIMIT"
```

```
FROM customers;
```

The above query produces an error on execution.

What is the reason for the error?

CUSTOMERS

CUST_NO	CUST_NAME	CUST_CITY	CUST_CREDIT_LIMIT
101	KING	NEW YORK	100000
102	GREEN	BOSTON	150000
103	SCOTT	LONDON	
104	SMITH	BOSTON	

- A. An alias cannot be used in an expression.
- B. The a lias NAME should not be enclosed with in double quotation marks .
- C. The MIDPOINT+100 expression gives an error because CUST_CREDIT_LIMIT contains NULL values.
- D. The a lias MIDPOINT should be enclosed with in double quotation marks for the CUST_CREDIT_LIMIT/2 expression .

Answer: A

16. Evaluate the following query:

```
SQL> SELECT promo_name q'{s start date was }' promo_begin_date  
AS "Promotion Launches"
```

```
FROM promotions;
```

What would be the outcome of the above query?

- A. It produces an error because flower braces have been used.
- B. It produces an error because the data types are not matching.
- C. It executes successfully and introduces an 's at the end of each promo_name in the output.
- D. It executes successfully and displays the literal " {s start date was } " for each row in the output.

Answer: C

17. View the Exhibit and examine the data in the EMPLOYEES table.

You want to generate a report showing the total compensation paid to each employee to date.

You issue the following query:

```
SQL>SELECT ename ' joined on ' hiredate  
' , the total compensation paid is '  
TO_CHAR(ROUND(ROUND(SYSDATE-hiredate)/365) * sal + comm)  
"COMPENSATION UNTIL DATE"  
FROM employees;
```

What is the outcome?

EMPLOYEES

ENAME	HIREDATE	SAL	COMM
SMITH	17-DEC-00	800	
ALLEN	20-FEB-99	1600	300
WARD	22-FEB-95	1250	500
JONES	02-APR-98	2975	
MARTIN	28-SEP-99	1250	1400
BLAKE	01-MAY-97	2850	

- A. It generates an error because the alias is not valid.
- B. It executes successfully and gives the correct output.
- C. It executes successfully but does not give the correct output.
- D. It generates an error because the usage of the ROUND function in the expression is not valid.
- E. It generates an error because the concatenation operator can be used to combine only two items.

Answer: C

18. Examine the structure of the PROMOTIONS table:

name	Null	Type
PROMO_ID	NOT NULL	NUMBER(6)
PROMO_NAME	NOT NULL	VARCHAR2(30)
PROMO_CATEGORY	NOT NULL	VARCHAR2(30)
PROMO_COST	NOT NULL	NUMBER(10,2)

The management wants to see a report of unique promotion costs in each promotion category.

Which query would achieve the required result?

- A. SELECT DISTINCT promo_cost, promo_category FROM promotions;
- B. SELECT promo_category, DISTINCT promo_cost FROM promotions;
- C. SELECT DISTINCT promo_cost, DISTINCT promo_category FROM promotions;
- D. SELECT DISTINCT promo_category, promo_cost FROM promotions ORDER BY 1;

Answer: D

19. Evaluate the following query:

```
SELECT INTERVAL '300' MONTH,
INTERVAL '54-2' YEAR TO MONTH,
INTERVAL '11:12:10.1234567' HOUR TO SECOND
FROM dual;
```

What is the correct output of the above query?

- A. +25-00 , +54-02, +00 11:12:10.123457
- B. +00-300, +54-02, +00 11:12:10.123457

C. +25-00 , +00-650, +00 11:12:10.123457

D. +00-300 , +00-650, +00 11:12:10.123457

Answer: A

20. Which three statements are true regarding the data types in Oracle Database 10g/11g? (Choose three.)

A. Only one LONG column can be used per table.

B. A TIMESTAMP data type column stores only time values with fractional seconds.

C. The BLOB data type column is used to store binary data in an operating system file.

D. The minimum column width that can be specified for a VARCHAR2 data type column is one.

E. The value for a CHAR data type column is blank-padded to the maximum defined column width.

Answer: ADE

Visualexams.com was founded in 2006. The safer,easier way to help you pass any IT Certification exams . We provide high quality IT Certification exams practice questions and answers(Q&A). Especially Adobe, Apple, Citrix, Comptia, EMC, HP, HuaWei, LPI, Nortel, Oracle, SUN, Vmware and so on. And help you pass any IT Certification exams at the first try.

Web site: <http://www.visualexams.com>

You can reach us at any of the email addresses listed below.

E-Mail: [visualexams \(at\) hotmail.Com](mailto:visualexams@hotmail.com)